



SOLID
TO SUCCEED



ROUGH TERRAIN SCISSOR LIFT

XG2225ERT

Comply with CE

Standard configuration

- Foldable guardrail
- Platform self-locking door
- Automatic unidirectional extension platform
- Boom safety maintenance support
- Lanyard connection point
- Fixing and lifting points
- 4-wheel drive
- 4-wheel steering
- Movement alarm
- Strobe light
- Electric horn
- Emergency stop button
- Battery power display
- Full proportion travel and lift control
- Outrigger leveling system
- Tilt protection system
- Charging protection system
- Auto brake system
- Fault diagnosis system
- Emergency lowering system
- Leveling outrigger support detection system
- Wheel-side traveling motor state monitoring and overtemperature stall protection system
- Weighing alarm system
- Full-stroke travelling
- Emergency pumps



Working height
22 meters



Lift capacity
750Kg



Electric
power



Optional configuration

- Platform external power supply

XCMG FIRE-FIGHTING SAFETY EQUIPMENT CO.,LTD

No.17 Zhujiang East Road, Hi-Tech Development Zone, Xuzhou, Jiangsu, China
mewp@xcmg.com

XG2225ERT



SOLID
TO SUCCEED

Rough Terrain Scissor Lift-Electric

Item	Metric
Dimension	
Overall length (without ladder/outriggers)	4950mm
Overall width	2455mm
Overall height (platform folded)	3850(3000)mm
Platform length	4590mm
Platform width	2250mm
Subplatform extension length	2700mm
Guardrail height	1100mm
Toeboard height	150mm
Outrigger span (side to side/front and rear)	2110mm/4610mm
Wheelbase	3300mm
Min. ground clearance (pothole protection deployed/undeployed)	400mm


Performance	
Max. working height	22m
Max. platform height	20m
Min. platform height	2,66m
Max. driving height	20m
Rated load	750kg
Subplatform rated load	750kg
Max. number of occupants (indoor/outdoor)	4/4
Max. driving speed (stowed)	5.0km/h
Max. driving speed (raised)	0.5km/h
Max. gradeability	30%
Min. turning radius (inside)	1.25m
Min. turning radius (outside)	3.4m
Platform raising time	95s
Platform lowering time	100s
Max. working slope (side to side/front and rear)	2°/3°
Outrigger leveling angle (side to side/front and rear)	/

Power source	
Battery voltage	48V
Battery capacity (5HR)	630Ah
Battery charger	48V/60A
Traveling motor	3.4kW/32V
Lifting motor	18kW/32V
Hydraulic tank capacity	160L


Tire	
Tire size	915mm×326mm
Tire ground pressure	8kg/cm ²
Driving wheels	4
Braking wheels	4
Steering wheels	4

Weight	
Total weight	14380kg

Stowed

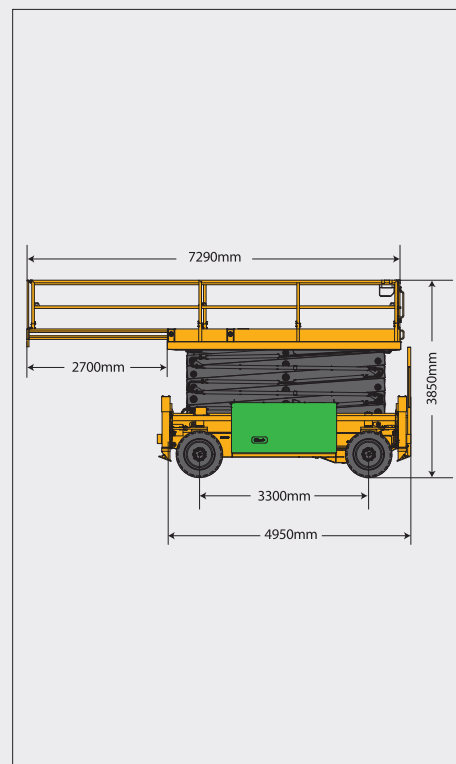

Trans

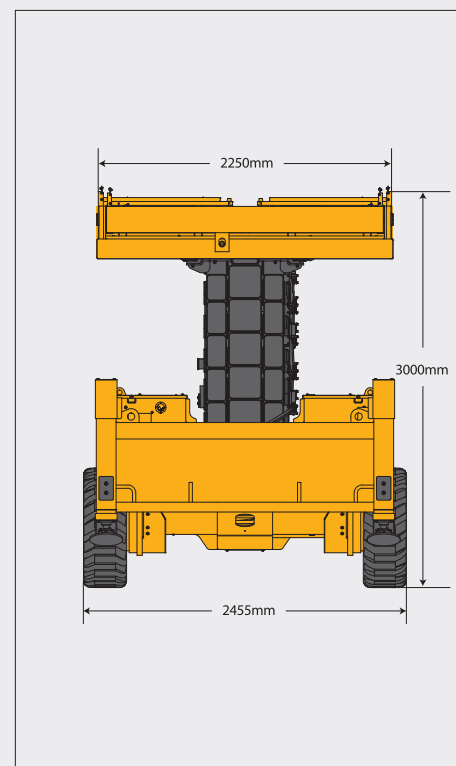

The print does not belong to the contract, nor a part of the commercial contract. We reserve the right to revise the product model, parameters, configuration based on the continuous improvement requirements of the product, without prior notice. Pictures are for reference only, and the specific product shall depend on the real product. The final interpretation rights belong to XCMG.