




TELEHANDLERS

XT2506KH

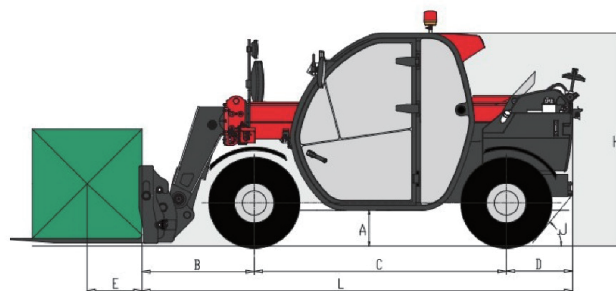

► LOAD CHART

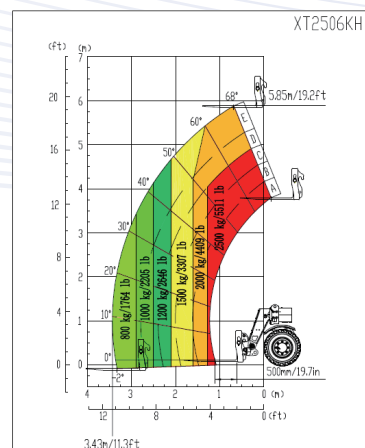

► STATIC DIMENSIONS

Dimensions		Metric
Min. Ground Clearance	A	330mm
Front Overhang	B	1025mm
Wheelbase	C	2300mm
Rear Overhang	D	605mm
Load Center Distance	E	500mm
Overall Length	L	3930mm
Overall Height	H	1975mm
Overall Width	M	1835mm
Approach Angle	I	/
Departure Angle	J	43°

XT2506KH

PARAMETERS

Parameters	Metric
Dimensions	
Overall Length	3930 mm
Overall Width	1835 mm
Overall Height	1975 mm
Wheelbase	2300 mm
Track Width	1500 mm
Min. Ground Clearance	330 mm
Fork Dimensions	1200 × 122 × 40 mm
Weight and Tyres	
Unladen Weight (with forks)	5200 kg
Standard Tyres / Tire Size	12-16.5
Performance	
Rated Load	2500 kg
Load Center Distance	600 mm
Max. Lifting Height (To Upper Plane Of Forks)	5.85 m
Lift Capacity At Max. Lifting Height	2000 kg
Max. Outreach (Boom Being Horizontal, Load Center Distance To The Front End Of Tyres)	3.43 m
Lift Capacity At Max. Outreach	800 kg
Boom Lifting Time	≤ 7.5 s
Boom Lowering Time	≤ 5.5 s
Boom Extension Time	≤ 4.8 s
Boom Retraction Time	≤ 3.5 s
Fork Dump Time	≤ 3.2 s
Fork Crowd Time	≤ 3.2 s
Boom Lifting Range	-2° ~ 68°
Fork Tilt Angle Range (Boom Being Horizontal)	-12° ~ 117°
Max. Travel Speed	20 km/h
Max. Traction Force	≥ 32 kN
Min. Turning Radius	≤ 3310 mm
Engine	
Power Source	Diesel Engine
Engine Brand/Model	Kubota V3307
Number Of Cylinders	4
Engine Rated Power	52.6 kw
Emissions	Stage V/T4F/Stage IV
Rated Speed	2400 r/min
Max. Torque @ Rpm	285 N.m@1500 rpm
Fuel Tank Capacity	95 L
Transmission	
Number of Gears (Forward/Reverse)	1/1
Transmission Type	Hydrostatic Transmission
Steering Mode	4-Wheel Steering
Drive Type	4x4
Hydraulic System	
Hydraulic Pump Type	Plunger Pump
Hydraulic System Pressure	28 MPa
Hydraulic System Flow	100 L/min
Hydraulic Tank Capacity	90 L

STANDARD CONFIGURATION

- **Cab**
 - FOPS/ROPS Certified Cab
 - Air Conditioning
 - 4-Way Adjustable Steering Column
 - 8" Main Display
 - 4.3" Sub Display
 - Radio
 - Bluetooth Hands-Free
 - 12 V Power Outlet
 - USB/Type-C Charging Port
 - Roof Sun Blind
 - Front Sun Visor
 - Interior Rearview Mirror
 - Exterior Rearview Mirror
 - Reversing Camera
 - Front Wiper
 - Rear Wiper
 - Roof Wiper
 - Rear Window Defroster
 - Fire Extinguisher
 - Dual Rotating Beacon (Amber/Amber)
 - Air-Suspended Fabric Seat
 - Emergency Hammer
 - Emergency Stop Switch
 - Cup Holder
 - Reversing Buzzer
 - Multifunction Proportional Joystick
 - License Plate Light
- **Power Transmission**
 - 4-Wheel Drive
 - 3 Steering Modes
 - Rear Axle Centering Display
 - Front Axle Limited-Slip Differential
 - Wet Brake System
 - Engine Intake Heater
- **Electrical System**
 - Torque Limiter
 - Working Envelope Display
 - Joystick Lock
 - Boom-Mounted Work Light
 - Cab Front And Rear Work Lights
 - Seat Belt Unbuckled Alarm
 - Seat Occupancy Sensor/Unoccupied Alert
- **Hydraulic System**
 - Open-Center Load Sensing System
 - Boom Tip Damping System
 - Quick Coupler Pressure Relief
 - Automatic Fork Leveling

- **Miscellaneous**
 - Boom Safety Strut
 - Rear Tow Hitch

OPTIONAL CONFIGURATION

- Dual Rotating Beacon (Amber/Green)
- Air-Suspended Leather Seat
- Electrically Adjustable Right Exterior Rear-View Mirror
- Telephone Holder
- Front Falling-Object Guard
- Foam-Filled Tyres
- Wheel Nut Indicators
- Wheel Chock
- Attachment Electrics
- Multi-Circuit Hydraulics for Attachments

OPTIONAL ATTACHMENTS

- Fork
- Bucket
- Hook
- Rotator